

60X120CM HIGH GLOSS COLLECTION



DELIGHT THATEXCEEDS EXPECTATIONS

manufacturing and selling integral porcelain tiles for all kinds of flooring and wall tiling solutions.

The manufacturing plant and main offices in Morbi, Gujarat IN, and the Worldwide logistics warehouses, make it possible to supply and deliver all the items in customers' orders. Through its national and international distribution network, Rey Cera exports tiles to more than 85 countries in all five continents.

As a result of our commitment to quality, all of our products comply with the guidelines of the ISO 9001:2000 standard, which guarantees that our research, development and commercializations are carried out with the maximum guarantees.







MOVE ON WITH EXCLUSIVE FEATURES

TECHNICAL FEATURES:



ANTI SLIP SURFACE



HYGIENIC SURFACE



FIRE RESISTANCE



EASY MAINTENANCE



HIGH DURABILITY





WATER RESISTANCE

600x 1200MM

The surprising shine of the materials enhances the prestige and natural beauty of surfaces. We have created a timeless amazing collection that definitely meets contemporary design with unmatched elegance. Their colors and structures coordinate with one another spontaneously and are therefore always in harmony. The size range allows for enhancement of any space and the utmost design freedom for newly created modular solutions. These multi size installation patterns clad any surface with style and class.



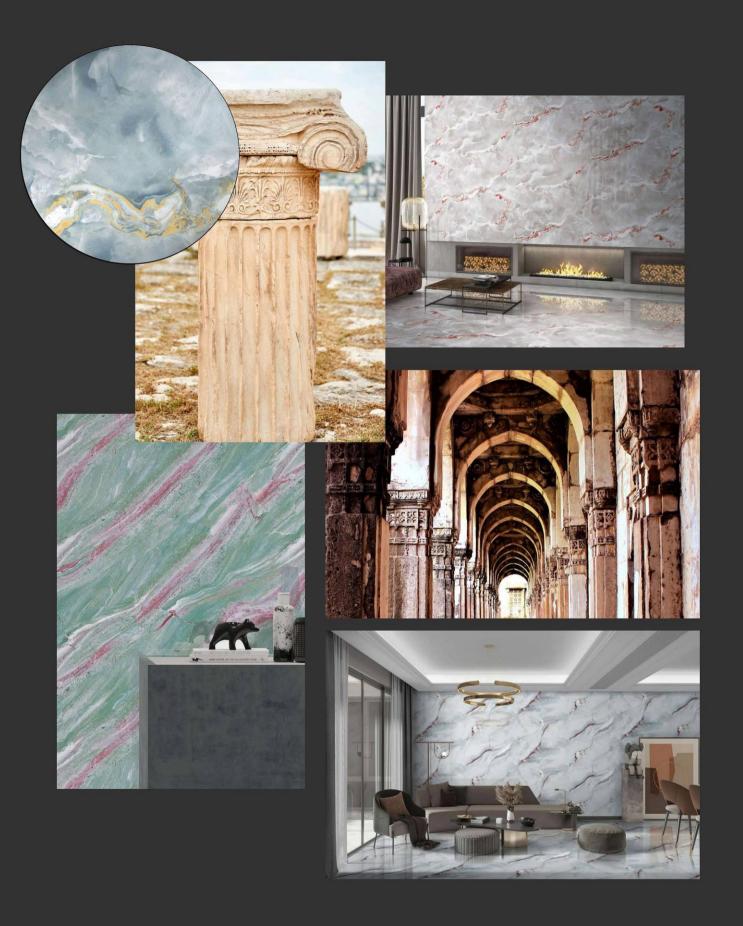
















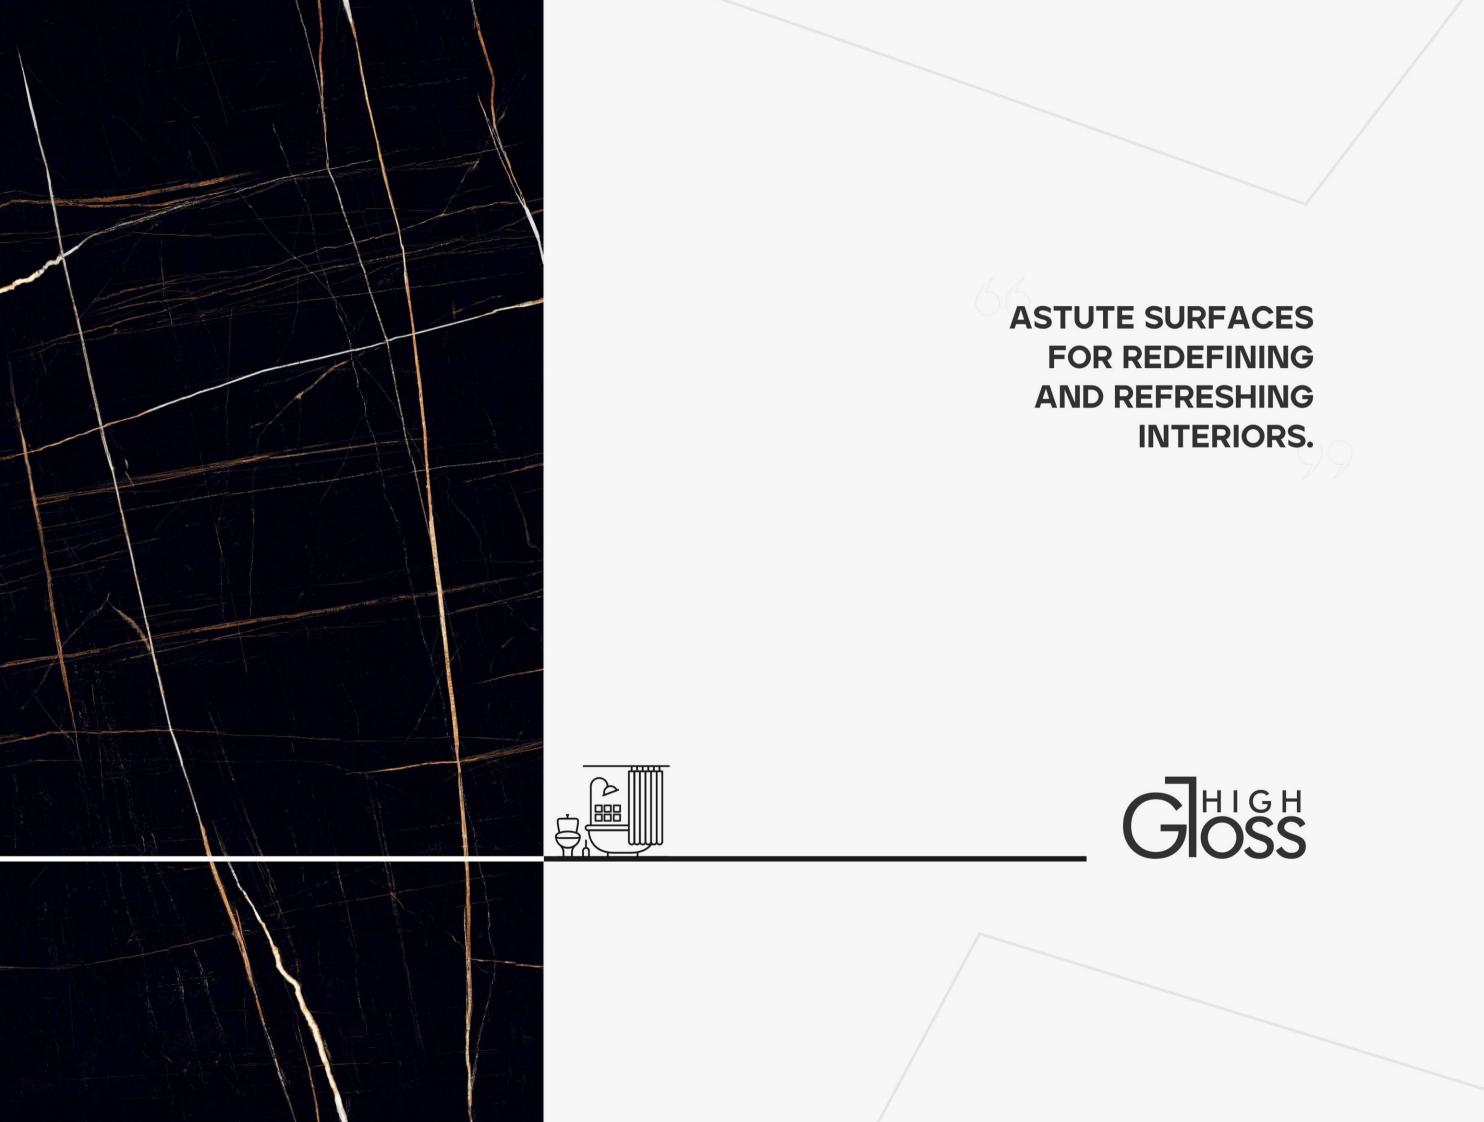

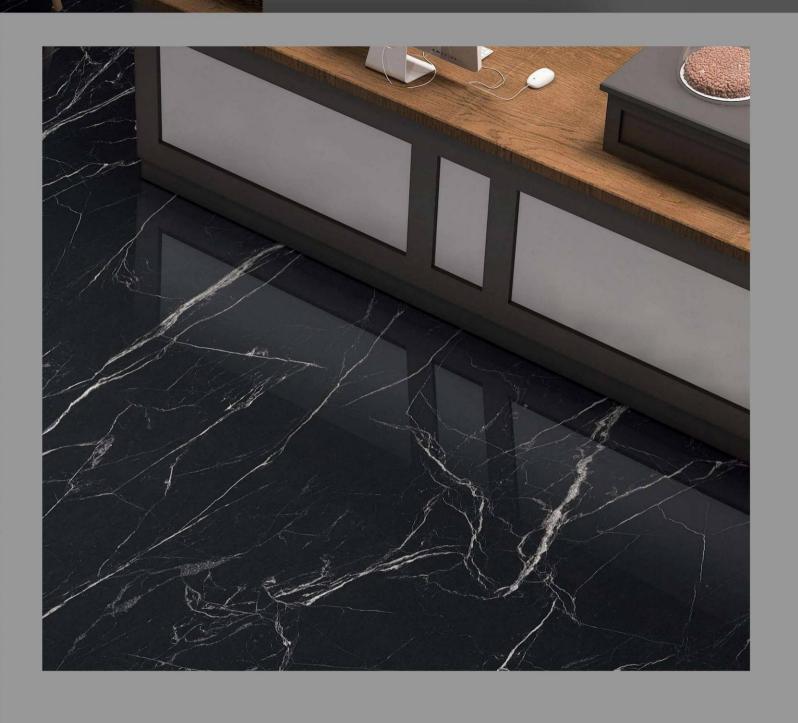

infinite possibilities

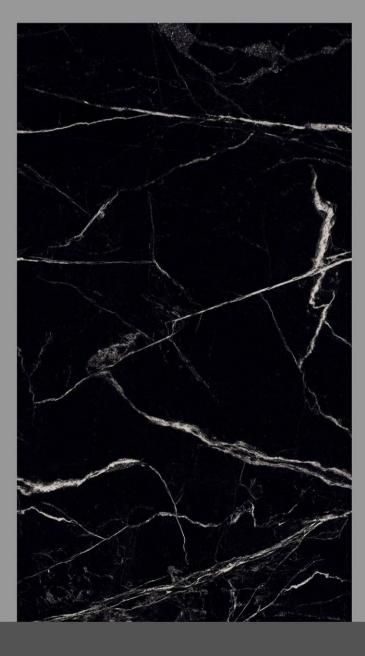




COSMIC BLACK
600x1200mm




COSMIC BLACK


HI-GLOSSE SURFACE

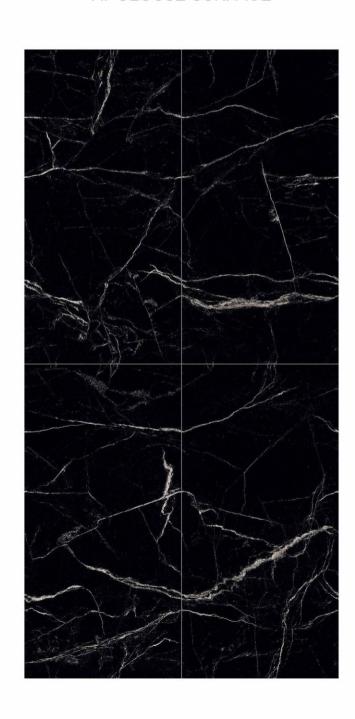



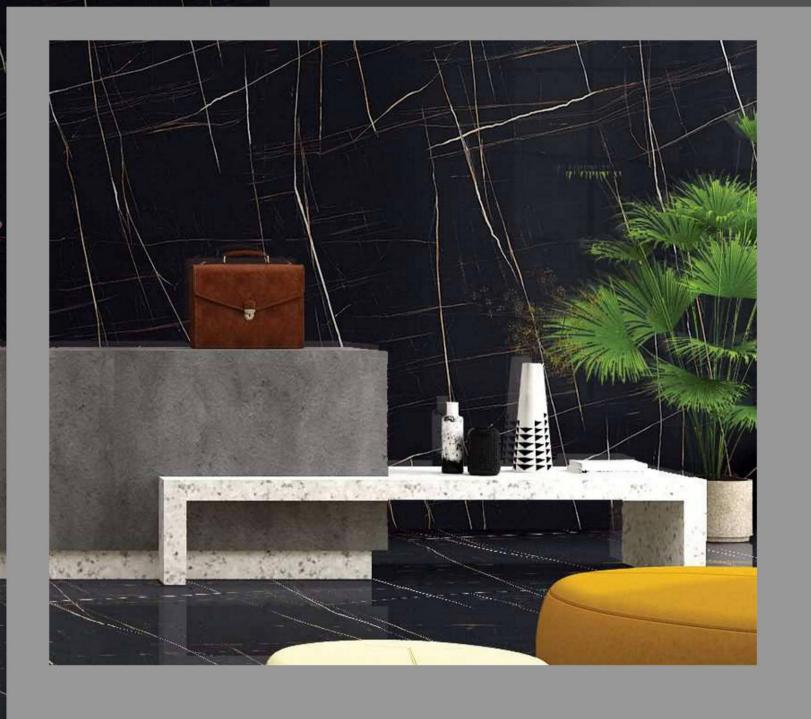

infinite possibilities

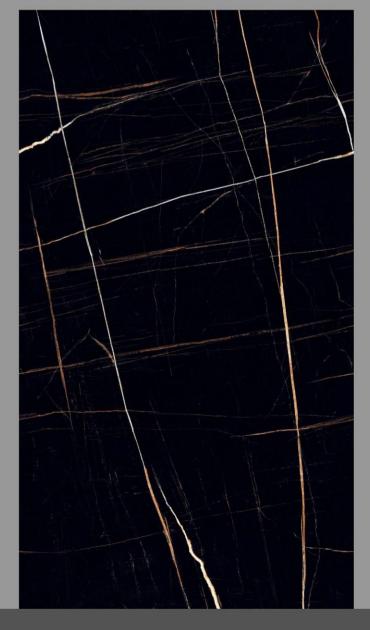



FERRO BLACK
600×1200mm



FERRO BLACK

HI-GLOSSE SURFACE










infinite possibilities

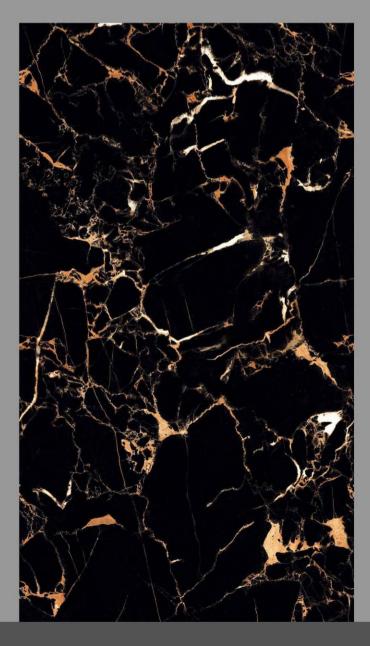




GALAXY BLACK NEW

600x1200mm



GALAXY BLACK NEW

HI-GLOSSE SURFACE

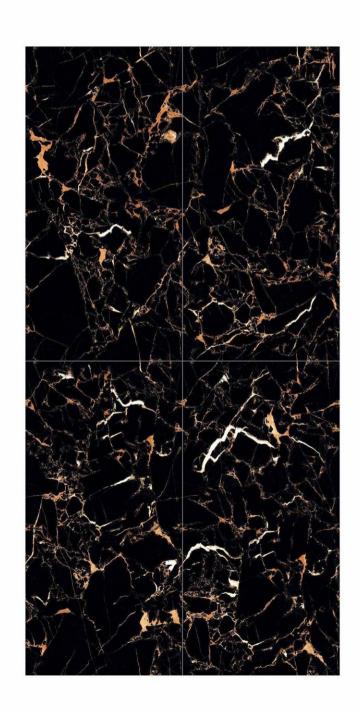



EXPORTS WORLDWIDE





TECHNICAL SPECIFICATIONS



TECHNICAL SPECIFICATIONS - GLAZED VITRIFIED TILES (GROUP Bla)

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP BLA	PORCELAIN VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-2	±0.6%	±0.2%
Deviation In Thickness	ISO-10545-2	±5%	±4%
Straightness Of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	<0.5%	<0.2%
Mohs Hardness	EN-101	Min.3	Min.3
Flexural Strength	ISO-10545-4	>35 N/mm2	>40N/mm2
Skid Resistance (Friction Coefficient)	ISO-10545-17	×	<0.2 (R9)
Breaking Strength	ISO-10545-11	>1113 N	>1800 N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	*	PEI III & IV
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

TECHNICAL SPECIFICATIONS - CERAMIC TILES

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP BLA	CERAMIC VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-02	±0.20%	±0.10%
Deviation In Thickness	ISO-10545-02	±7.00%	±0.10%
Straightness Of Sides	ISO-10545-02	±0.15%	±0.10%
Rectangularity	ISO-10545-02	±0.20%	±0.15%
Surface Flatness	ISO-10545-02	±0.30%	±0.20%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-03	<10%	16 <u>+</u> 2%
Mohs Hardness	EN-101	Min. Class 3	Compliant
Flexural Strength	ISO-10545-04	R >15 N/mm2	Compliant
Skid Resistance (Friction Coefficient)	ISO-10545-08	<9.0 x 10-6EC-1	Compliant
Breaking Strength	ISO-13630-06	600 Min.	Compliant
Frost Resistance	ISO-13630-03	0.04 mm/M Max.	Compliant
Thermal Shock Resistance	ISO-10545-09	Min. 10 Cycles	Compliant
Moisture Expansion	ISO-13630-03	0.04 mm/M Max.	Passed 10 Cycle
Resistance to Surface Abrasion	ISO-13630-14	0.55 Min.	4 Cycle Passed
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	As per Mfg.	No visible effect
Color Resistance	ISO-10545-13	Class AA Min.	Compliant
Stain Resistance	ISO-10545-14	Class 1 Min.	Compliant





CORPORATE OFFICE:

Edan Ceramic City, Opp. Honest Hotel, 8-A NH, At. Lalpar - 363642, Dist. Morbi, Gujarat - (INDIA)

E-mail: export@reyceramic.com | Mob.: +91 90999 06545

GROUP OF COMPANIES:

REY CERA CREATION PVT. LTD.

8-A, N.H, Sartanpar Road, Opp. Kevin Ceramic, At. Ratavirda, Tal. Wankaner, Dist. Morbi (Gujrat) India.

SIMBEL CERAMIC PVT. LTD.

8-A, National Highway, Dhuva-Matel Road, At. Lakaddhar, Morbi - 363 642, Gujarat, India

ADORATION CERAMICA PVT.LTD.

8-A, N.H , Virpar-Bhimguda Road, Opp. Armano Vitrified, Ta. Vankaner, Dist. Morbi (Gujrat) India.



WEB: www.reycera.com

Join us on: | f @ 💆 in